


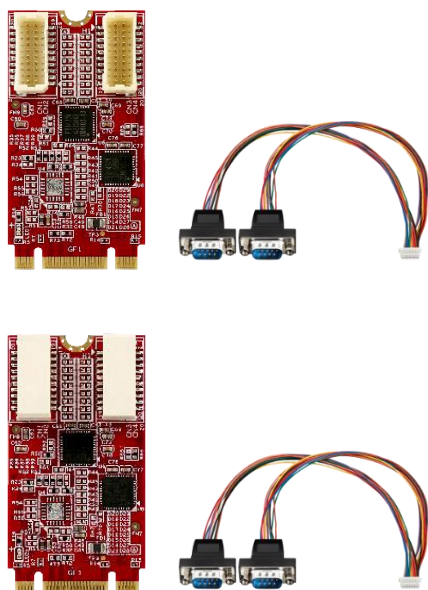

EGP2-X403

M.2 2242 to Four RS-232 Module

HIGHLIGHT FEATURES

- PCI Express base spec 1.1 compliant
- 4800bps to 921.6Kbps serial data rate
- Compatible with 16C550 / 16C650 / 16C750 / 16C850 / 16C950, 128-byte FIFOs
- Full RS-232 functions with DB9 connector
- Alternative vertical or horizontal connector
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Operating temperature from -40°C to 85°C

SPECIFICATIONS


Model Name	EGP2-X403
Module Type	M.2 to Four RS-232 Module
Form Factor	M.2 2280 B+M Key
Function	Serial
Input I/F	PCI Express 1.1 x1
Output I/F	RS-232
Output Port	4
Output Connector	DB-9
Max. Power Consumption	1.656W (3.3V, 502mA)
Dimension (W x L x H/mm)	Vertical : 22 x 42 x 6.83 Horizontal : 22 x 42 x 7.93
Temperature	Operation : S/T 0°C ~ 70°C ; W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : 7, 10, and above version Linux : Kernel v2.6.8 and above
Warranty	3 Years
Notes	--

ORDER INFO.


P/N	Description
EGP2-X403-W1	M.2 2242 to Four RS-232 Module, Vertical Connector / Wide Temperature
EGP2-X403-W2	M.2 2242 to Four RS-232 Module, Horizontal Connector / Wide Temperature

MECHANICAL DRAWING


EGP2-X403-W1
(Vertical Connector)

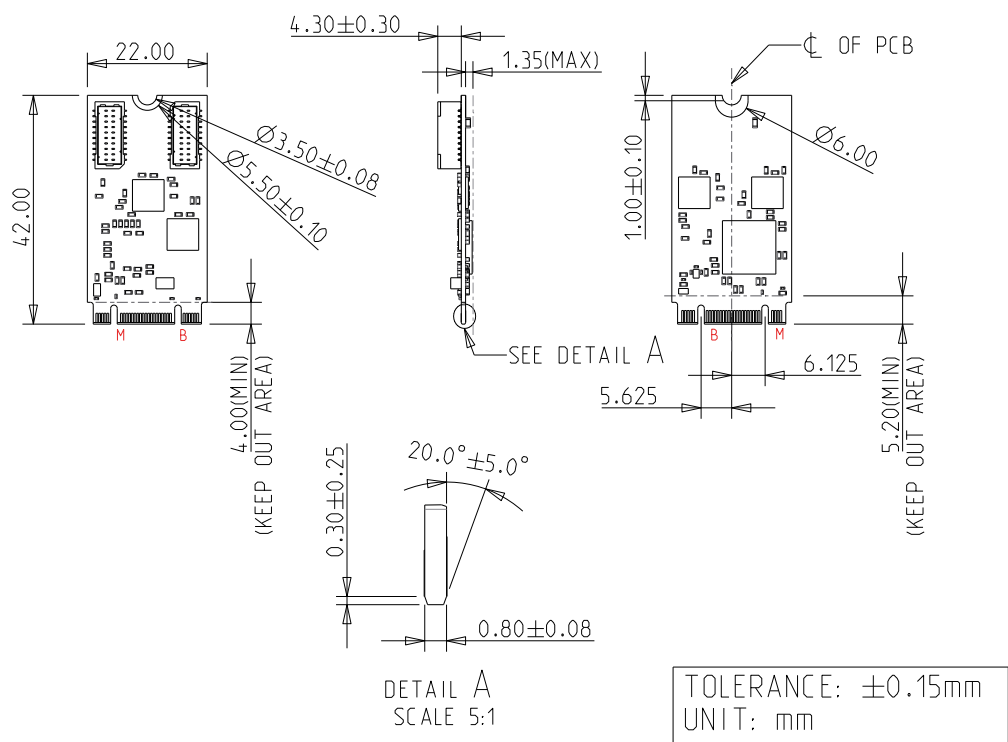


EGP2-X403-W2
(Horizontal Connector)

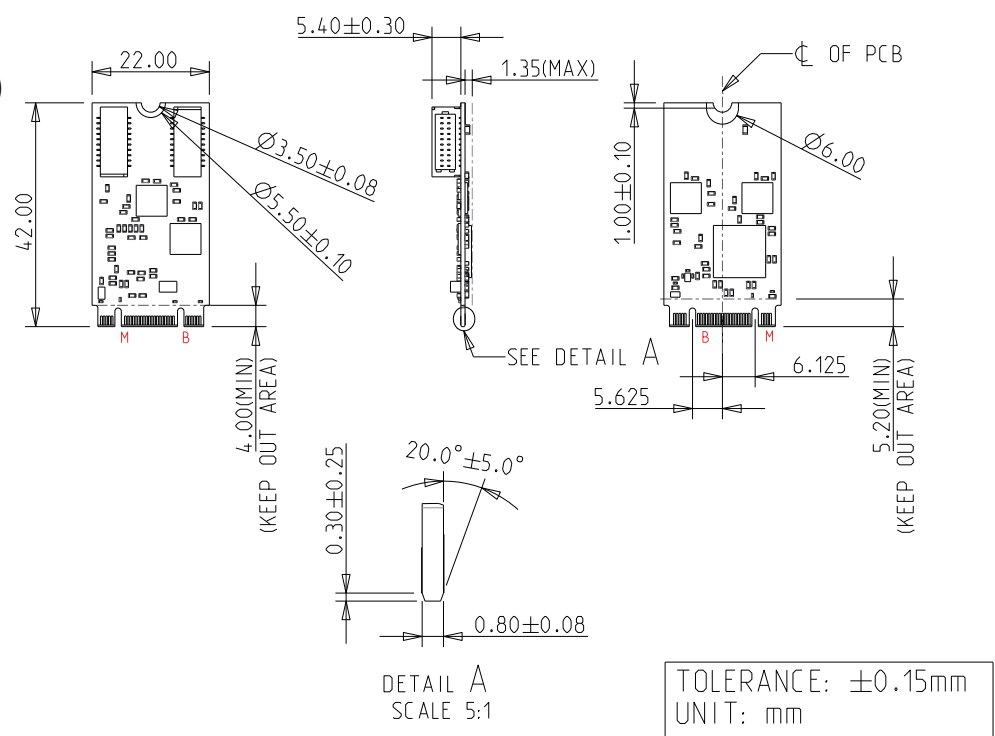

PIN DEFINE

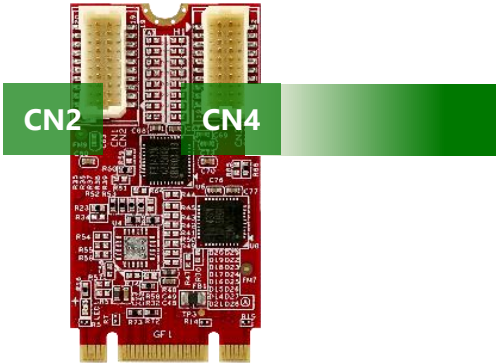

CN1 & CN2 Wire to Board SMD 2 x 10P Connector			
Signal	Pin	Pin	Signal
DCDN1	2	1	DCDN2
SINN1	4	3	SINN2
SOUTN1	6	5	SOUTN2
DTRN1	8	7	DTRN2
GND	10	9	GND
DSRN1	12	10	DSRN2
RTSN1	14	12	RTSN2
CTSN1	16	14	CTSN2
RIN1	18	16	RIN2
NC	20	18	NC

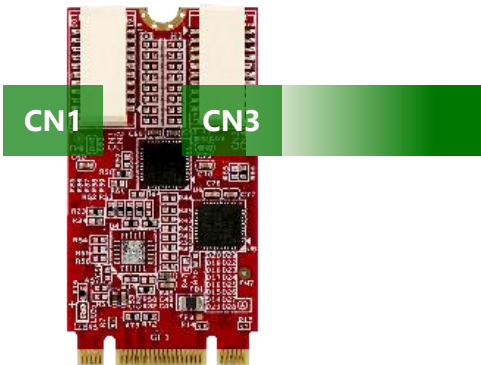

DB9 Pin Define	
Pin	RS-232 Signal
1	DCD
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI

CN3 & CN4 Wire to Board SMD 2 x 10P Connector			
Signal	Pin	Pin	Signal
DCDN3	1	2	DCDN4
SINN3	3	4	SINN4
SOUTN3	5	6	SOUTN4
DTRN3	7	8	DTRN4
GND	9	10	GND
DSRN3	11	12	DSRN4
RTSN3	13	14	RTSN4
CTSN3	15	16	CTSN4
RIN3	17	18	RIN4
NC	19	20	NC