


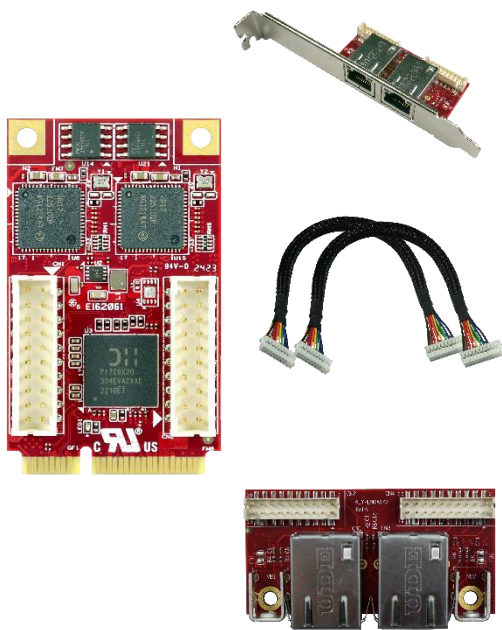

EMPL-G201

mPCIe to Dual GbE LAN Module

HIGHLIGHT FEATURES

- Complies with EN61000-4-5 1kV surge protection
- Complies with IEC 60950-1 : 2005 + A1 : 2009 + A2 : 2013 2kV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Flexible daughter board with cable to fit into different system
- Optional terminal mounting hole or bracket for daughter board
- Optional industrial temperature (-40°C to 85°C) support

SPECIFICATIONS


Model Name	EMPL-G201
Module Type	mPCIe to Dual GbE LAN Module
Form Factor	mPCIe
Function	LAN
Input I/F	PCI Express 2.0 x1
Output I/F	GbE LAN
Output Port	2
Output Connector	RJ45
Max. Power Consumption	1.485W (3.3V, 450mA)
Dimension (W x L x H/mm)	30 x 50.9 x 9.2
Temperature	Operation : S/T 0°C ~ 70°C ; W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : XP (32bit), 7 (32 / 64bit), 8 / 8.1 (32 / 64 bit), 10 (32 / 64bit), and above version Linux : Kernel 2.4 series, 2.6.x, 3.x, and above version.
Warranty	3 Years
Notes	• Please download driver from Intel official website. • Not recommend used in VMware ESXi due to High Latency.

ORDER INFO.


P/N	Description
EMPL-G201-C3	mPCIe to Dual GbE LAN Module, Terminal Mounting Hole / Standard Temperature
EMPL-G201-W3	mPCIe to Dual GbE LAN Module, Terminal Mounting Hole / Wide Temperature
EMPL-G201-C4	mPCIe to Dual GbE LAN Module, Bracket / Standard Temperature
EMPL-G201-W4	mPCIe to Dual GbE LAN Module, Bracket / Wide Temperature

MECHANICAL DRAWING

Main Board

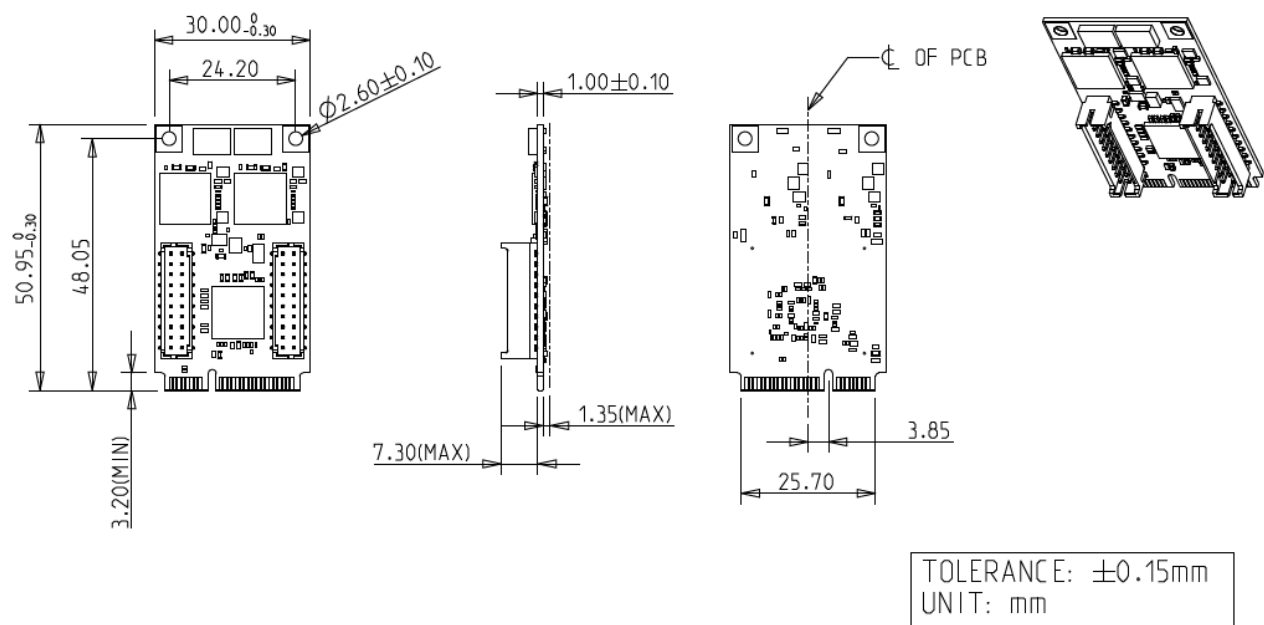


EMPL-G201-C3 / W3 Daughter Board

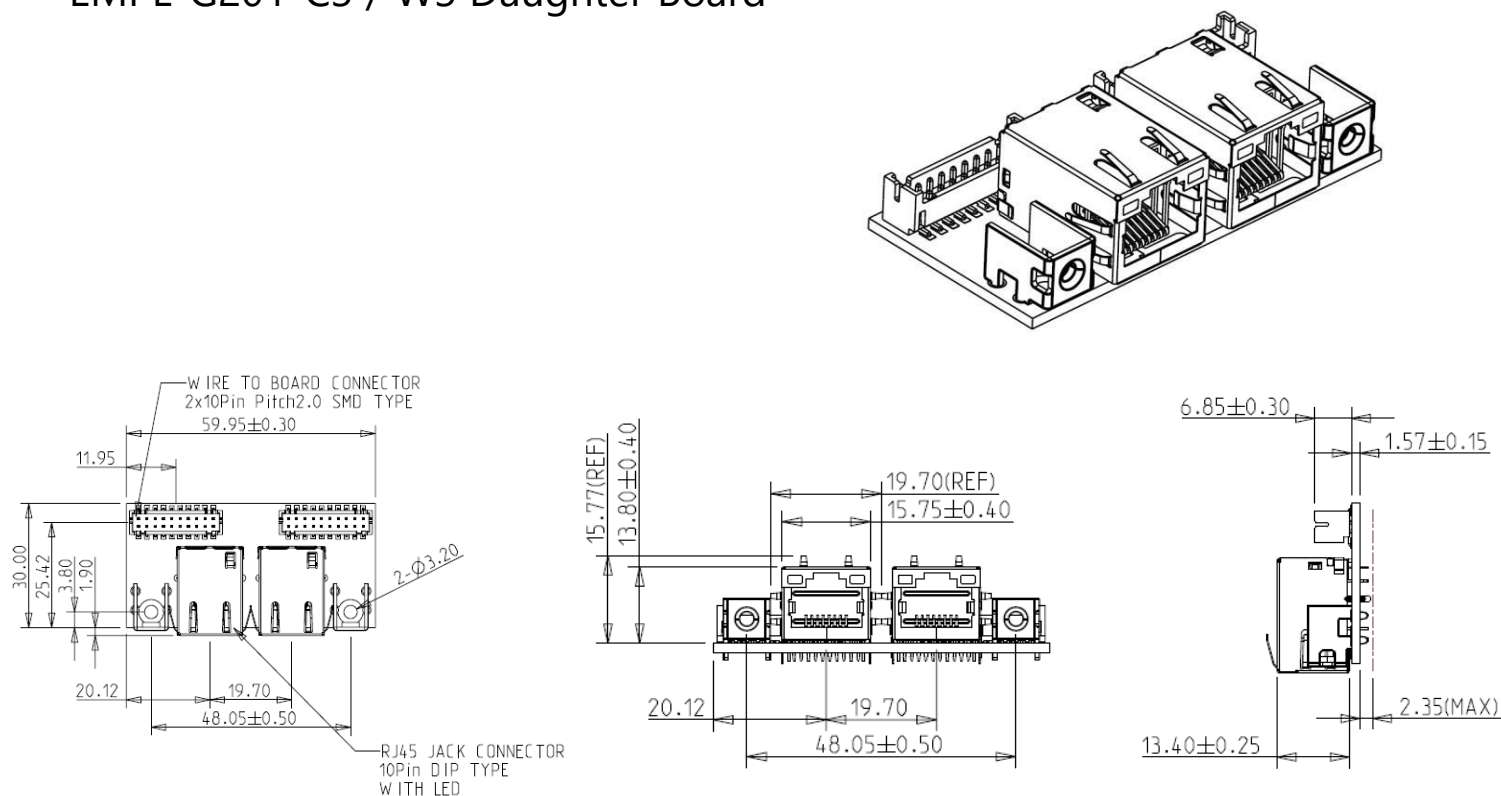


MECHANICAL DRAWING

EMPL-G201-C4 / W4 Daughter Board

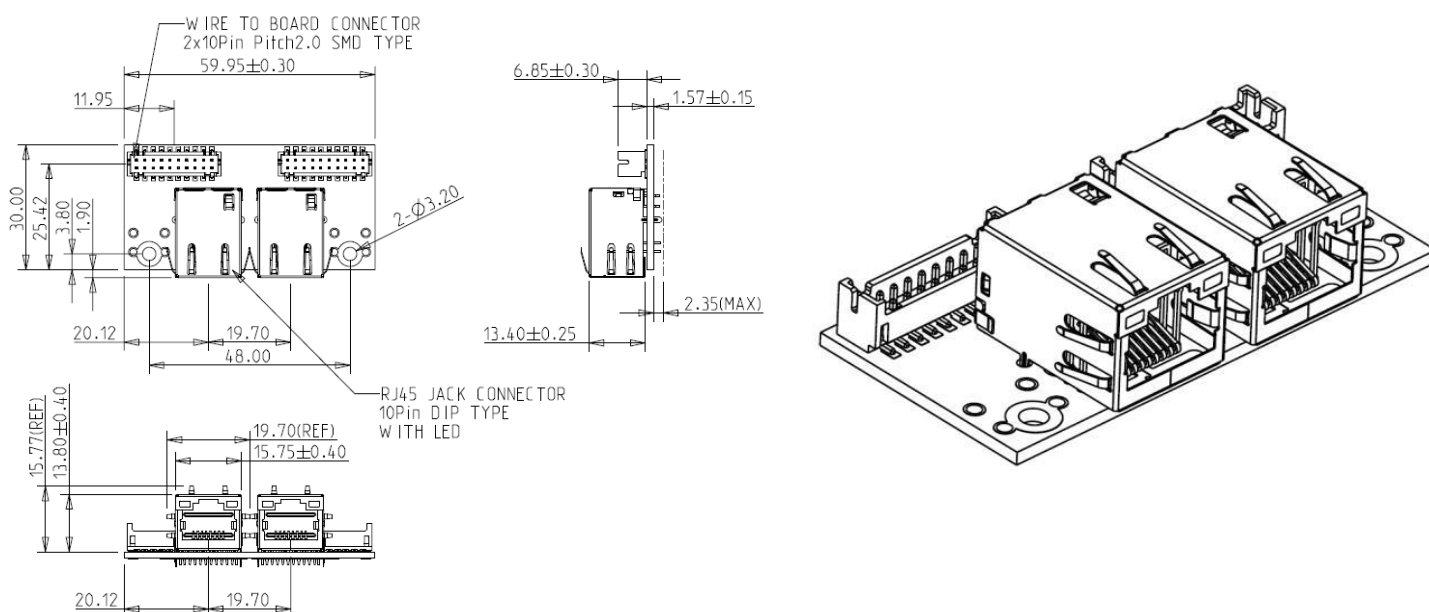

Bracket

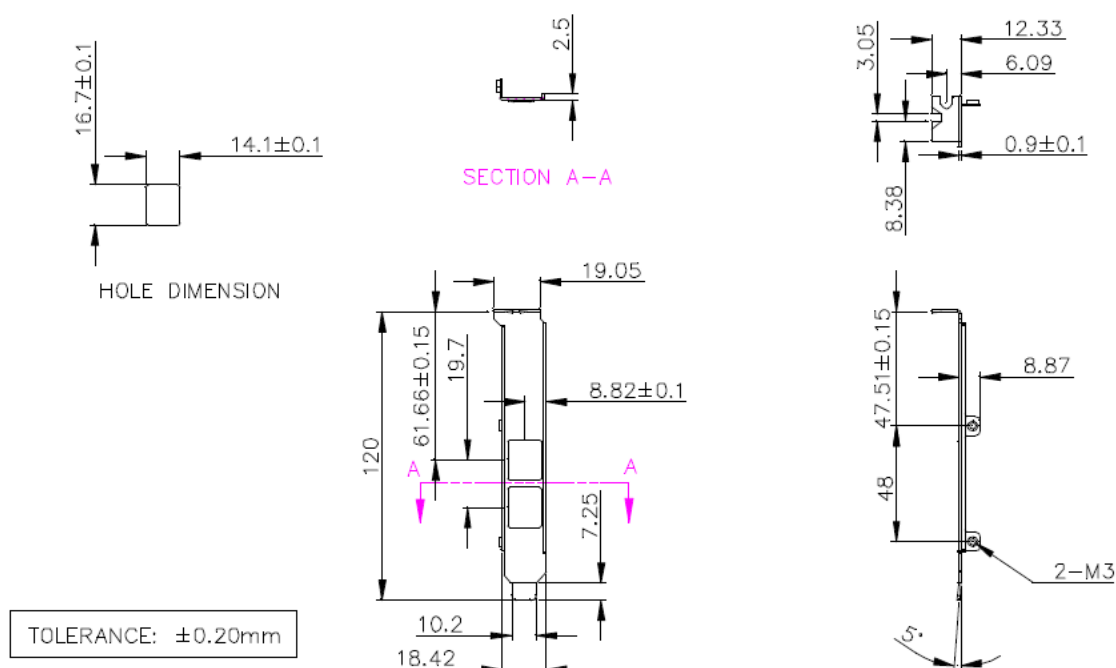

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk