


ESPL-2401

PCIe to Four 2.5GbE LAN Module

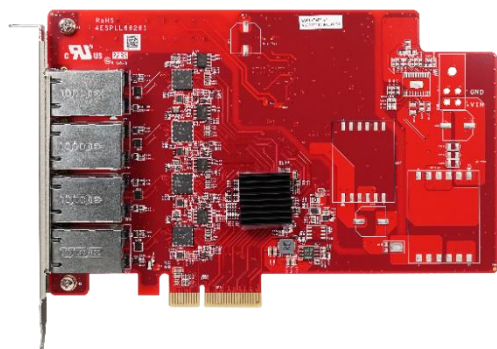

HIGHLIGHT FEATURES

- Intel i226 controller
- Supports four 2.5GbE LAN ports
- Complies with EN61000-4-5 2kV surge protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Optional industrial temperature (-40°C to 85°C)
- Supports 30μ" golden finger, 3-year warranty
- Industrial design, manufactured in Innodisk Taiwan


SPECIFICATIONS

Model Name	ESPL-2401
Module Type	PCIe to Four Isolated 2.5GbE Module
Form Factor	Standard PCIe
Function	LAN
Input I/F	PCI Express 2.1 x4
Output I/F	2.5GbE LAN
Output Port	4
Output Connector	RJ45
Max. Power Consumption	LAN : 7.46W (3.3V, 636mA ; 12V, 447mA)
Dimension (W x L x H/mm)	169.55 x 111.15 x 19.6
Temperature	Operation : S/T 0° ~ 70°C ; W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : 10 (64bit), and above version Linux (igc) : Kernel 5.x version
Warranty	3 Years
Notes	• Please download driver from Intel official website. • Linux Kernel rebuild is needed (modify igc driver) if version < 5.16.18. • Not recommend used in VMware ESXi due to High Latency. • Not support Intel vPro.

ORDER INFO.

P/N	Description
ESPL-2401-C1	PCIe to Four 2.5GbE LAN Module / Standard Temperature
ESPL-2401-W1	PCIe to Four 2.5GbE LAN Module / Wide Temperature

MECHANICAL DRAWING

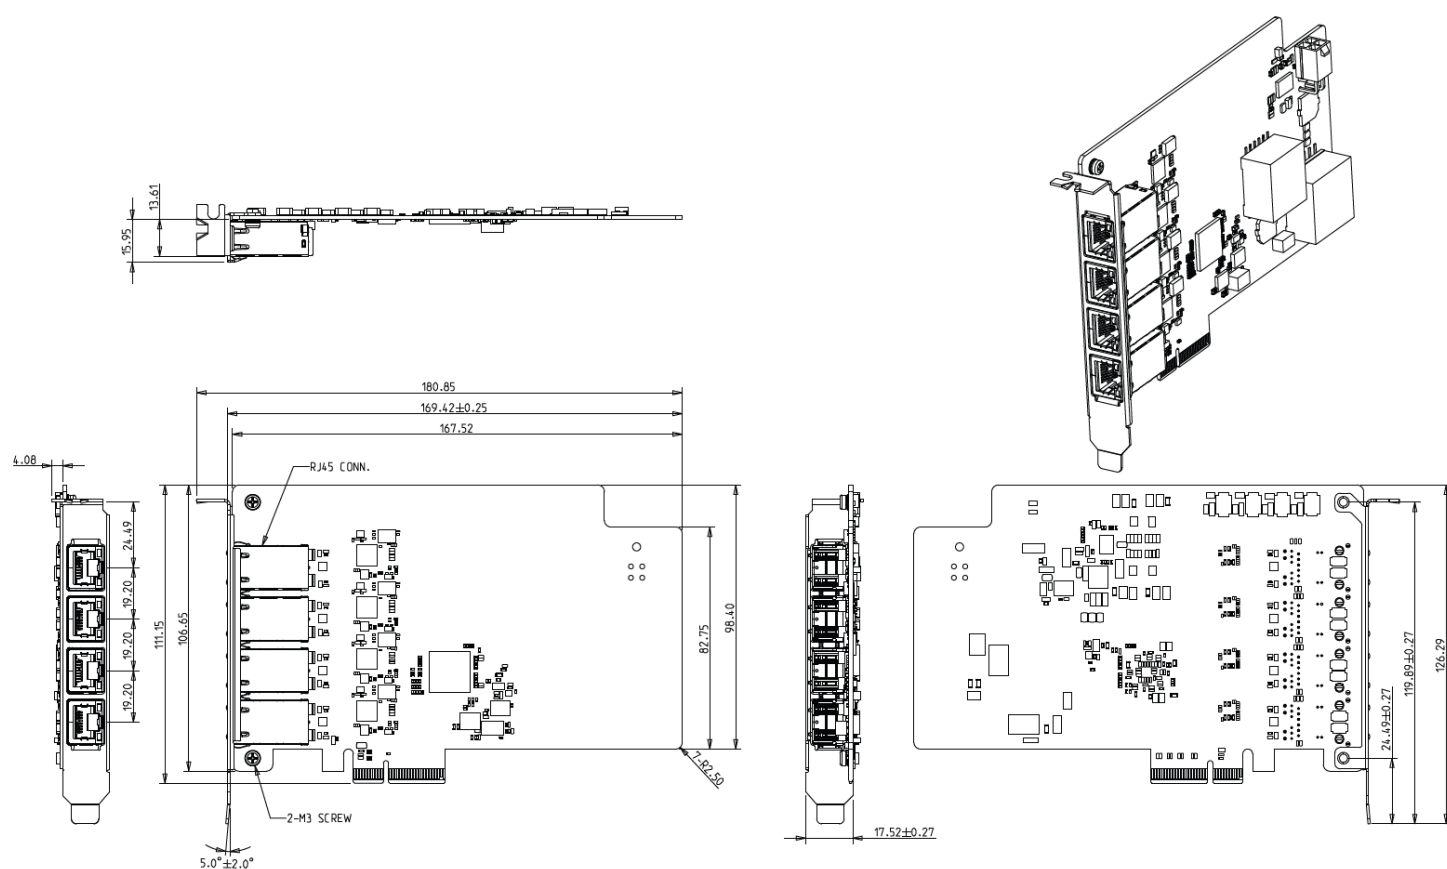

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk