

InnoEx-IPCKVM

LAN to 3 x USB / 1 x HDMI



HIGHLIGHT FEATURES

- Expands I/O through virtualization technology
- Extends I/O via RJ45 Ethernet
- Simulates remote I/O on local computer
- Keeps I/O behavior and data format. No change of I/O operation
- Supports PoE connection (optional), compliant with IEEE 802.3at/af
- Supports display output of HDMI 1.4
- Supports 3 USB 2.0 ports (5V1A per port)

SPECIFICATIONS


Model Name	InnoEx-IPCKVM
Module Type	LAN to 3 x USB / 1 x HDMI
Form Factor	Other
Function	InnoEx Virtual I/O
Input I/F	LAN
Output I/F	1 x HDMI 1.4 3 x USB 2.0 (Type A connector)
Output Port	4
Output Connector	1 x HDMI 3 x USB 2.0 (Type A connector)
Max. Power Consumption	--
Dimension (W x L x H/mm)	115 x 115 x 22
Temperature	Operation : -10°C ~ 85°C (Ta) Storage : -20°C ~ 90°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : 10 (32 / 64bit), and above version Linux : Kernel 4.4 and libssl 1.0 above
Warranty	3 Years
Notes	HDMI support Windows x86 only.

ORDER INFO.


P/N	Description
EA1-9NIPCKVM1301	InnoEx IPCKVM LAN to 2 x USB / 1 x HDMI, LAN
EA1-9NIPCKVM1301-P	InnoEx IPCKVM LAN to 2 x USB / 1 x HDMI, PoE

INTERFACE & VESA MIS-D

Item	Description
1	DC-Jack Power Input
2	GbE LAN Port
3	HDMI Port
4	USB 2.0 Port1
5	USB 2.0 Port2
6	USB 2.0 Port3
7	LED
8	Reset Button

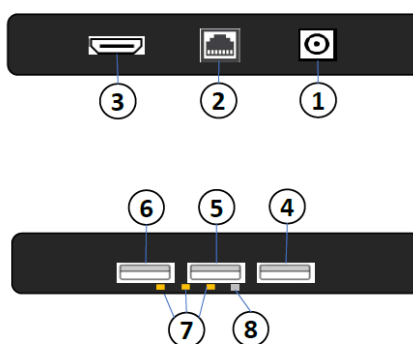

▲ Interface




▲ VESA MIS-D


INDUSTRIAL I/O VIRTUALIZATION TECHNOLOGY (IIOVT)

InnoEx allows integrators to expand I/O ports, as well as extend their range up to 100m¹ from LAN to LAN, or extend without limit through the internet via I/O virtualization. InnoEx connect devices act as if they are connected directly to the system itself, and always maintain their original device behavior. Simply install the InnoEx IIOVT driver onto the industrial computer and the InnoEx device via an Ethernet cable to get started.

(Note 1. Signal strength may be weakened due to site conditions and equipment deployment. A recommended deployment distance is 80 meters, or use with a switch.)

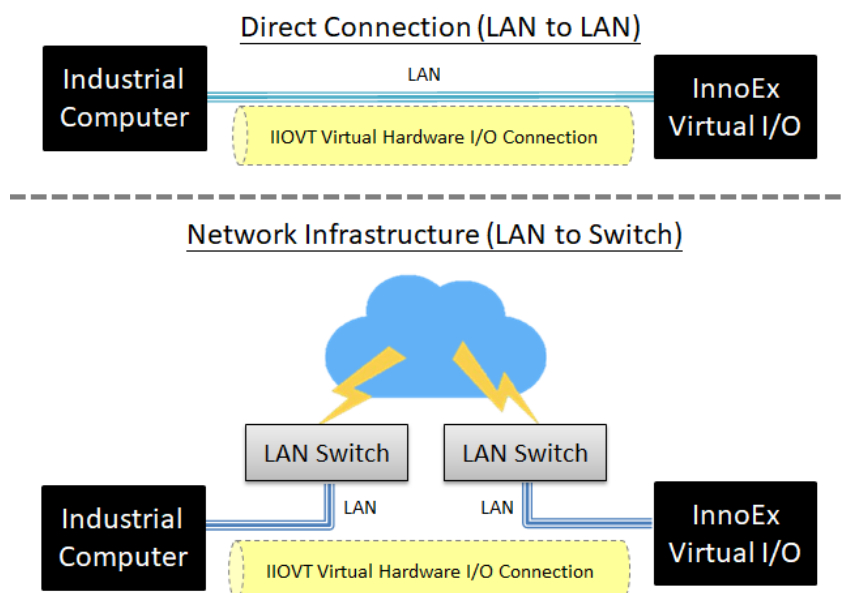

LAN TO USB / HDMI APPLICATIONS ARCHITECTURE

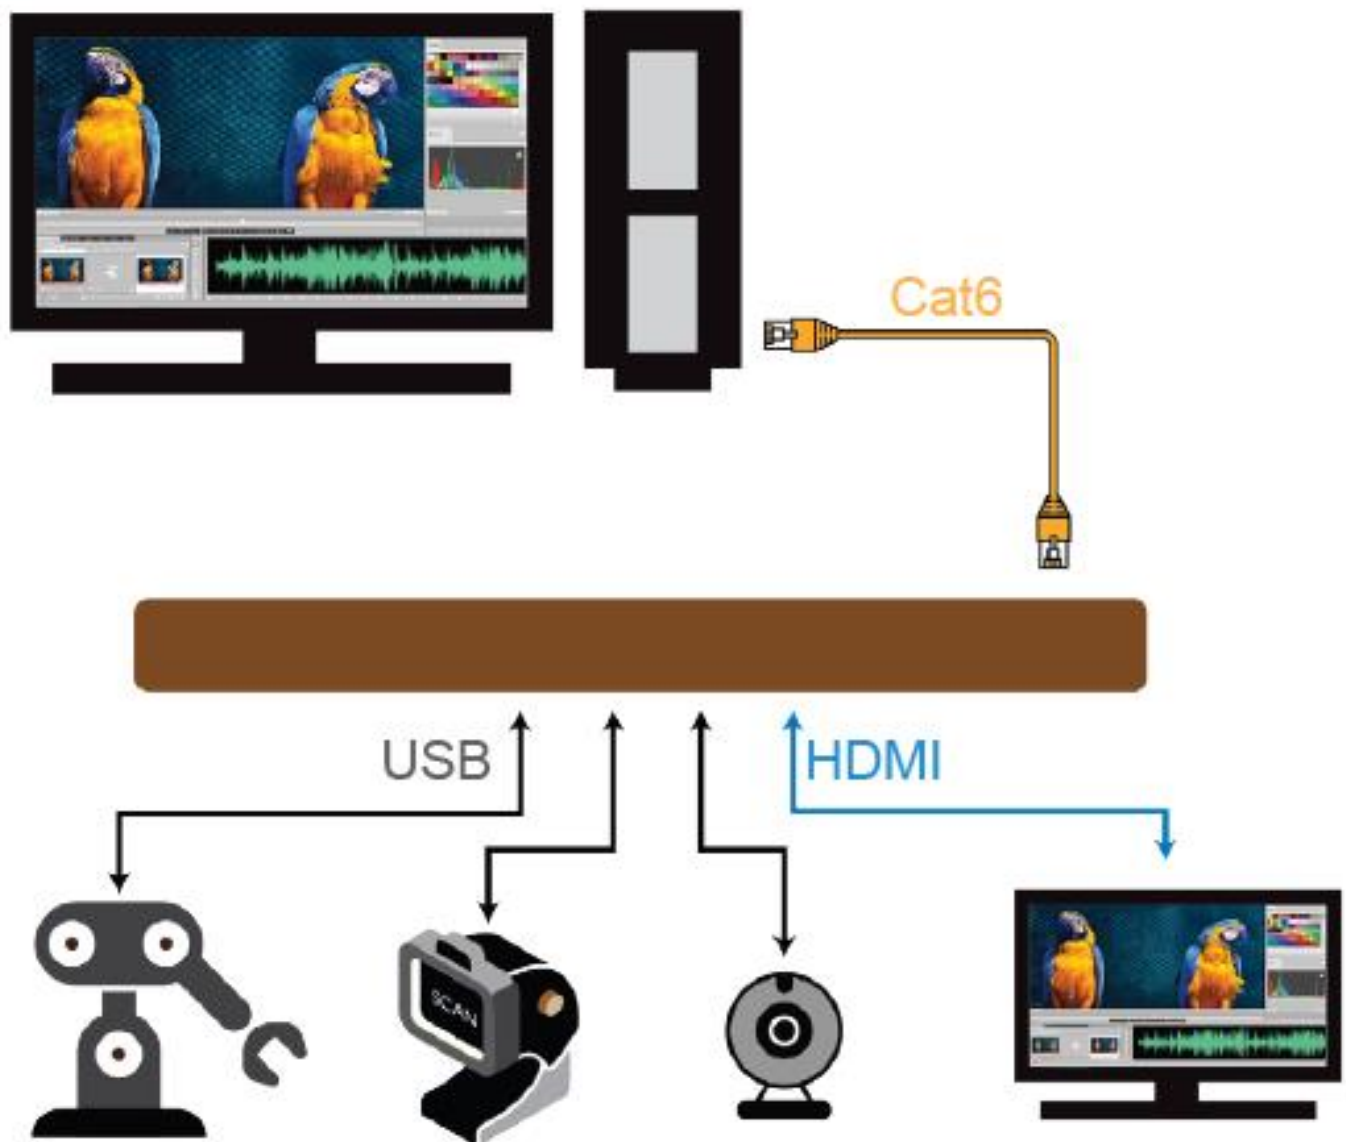

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk